JB-A-04/06/08



Features

- ABS-plastic die cast body
- East to assemble and calibrate, high reliability
- Fully encapsulated, water-proof, moisture proof and lightning protected.
- Surge protection
- Exitation matched adjusting method
- Operating temperature: -40℃～+85℃


Description

- Specially designed for scales
- This model are available to connect 4 to 8 load cells with 4-wire cable on different requests.

Optional table

Part number	CHANNEL
JB-A-04	4
JB-A-06	6
JB-A-08	8

Outline Dimension mm(inch)

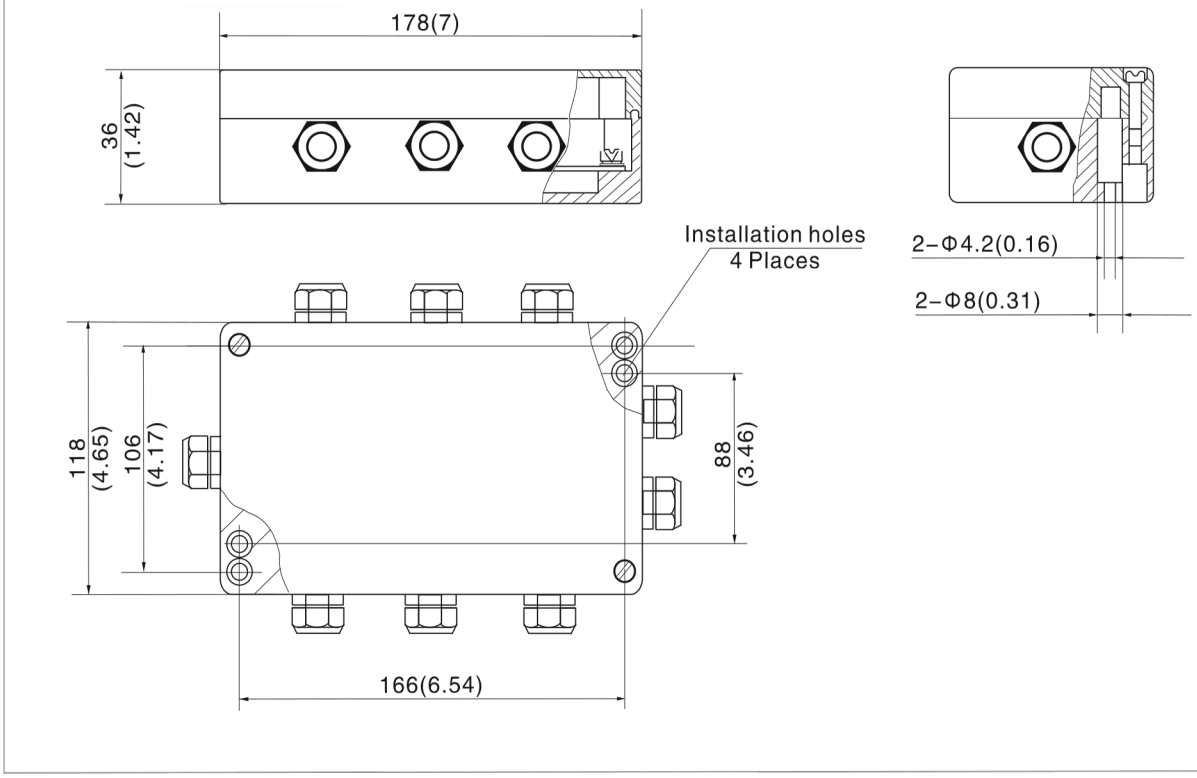

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

SCALETEC MECHATRONICS PRIVATE LIMITED
Plot No. 665, GIDC Makarpura,
Vadodara ,Gujarat,
India – 391775

T: +91 9909966404
F: +91-265-23118 4
2 info@scale-tec .i n